


rfBCK +2,3,4,5,6



rfBCK +23456, I/O

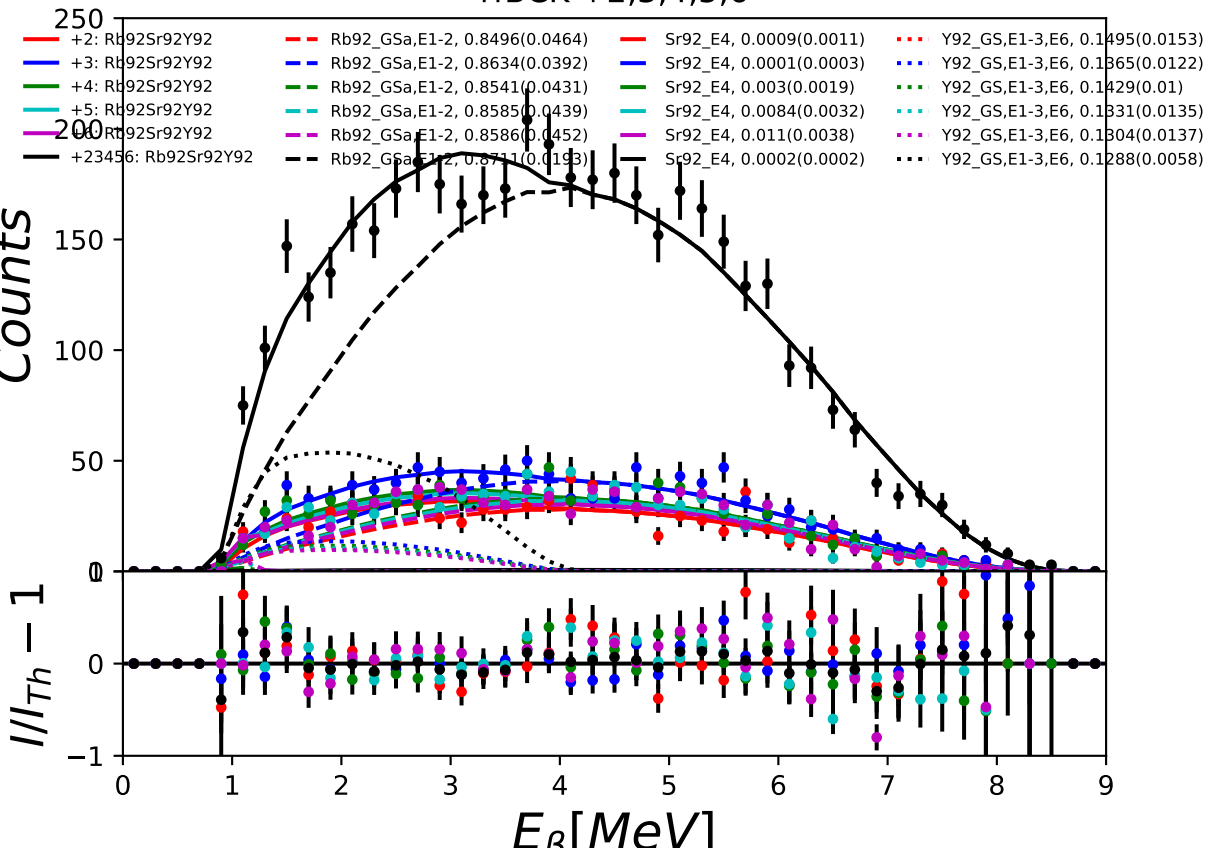